



Electromagnetically Shielded Room

- Industrial, Telecommunications, and Research/Development applications
- Isolation superior to 80dB, measured in accordance to the ASTM E1851-04, *Standard Test Method for Electromagnetic Shielding Effectiveness of Durable Rigid Wall Relocatable Structures.*
- Dimensions and configurations designed according to customer specifications

THIS PRODUCT WAS DEVELOPED WITH TECHNOLOGY ACQUIRED WITH FINEP SUPPORT:

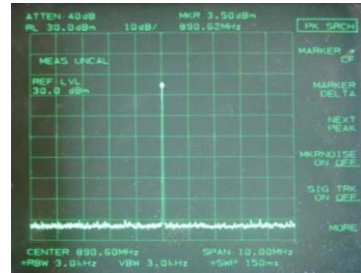

Door opened (890.60MHz)

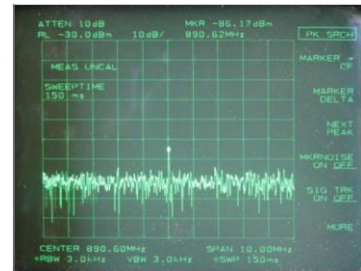

Door closed (890.60MHz): ISOLATION: -89,67dB



Shielded honeycomb vent ports

Shielded doors with 3-point locks.



Caster wheels (for small-sized chambers)

RF connections panel



Line filter for AC power connection



LED lighting



Workbench with power outlets



Shown unit information:

Dimensions (HxWxD) (mm)	2050x790x1200
Part #	36783