

**Roxtec Sealed Entry System for Cables and Pipes**

The Roxtec system uses rubber sealing modules with a center core and removable black and blue layers. It ensures adaptability to different sizes of cables and pipes. The Roxtec sealing modules can be installed in advance. When you want to route cables or pipes you can open up the seal, adapt the modules, add new cables and re-seal the transit.



The kits shown in this page are the ones commonly used for mobile units and shelters.

For information about other Roxtec products, please call us.

**CRL kits**

Round frames for 4" and 5" diameter holes, IP 54.

Kit	# of cables	Diameter range and cable quantity			Dimensions ØxP (mm)	Wgt (kg)	RF COM PN
		5 to 16.5 mm	11 to 29 mm	24 to 54 mm			
CRL 4"/1	1			1	98 x 38.5	0.6	<b>49301</b>
CRL 4"/4	4		4		98 x 38.5	0.6	<b>49300</b>
CRL 4"/5	5	3	2		98 x 38.5	0.6	<b>49299</b>
CRL 4"/9	9	9			98 x 38.5	0.6	<b>49298</b>
CRL 5"/1	1			1	123 x 38.5	0.95	<b>49297</b>
CRL 5"/4	4		4		123 x 38.5	0.95	<b>49296</b>
CRL 5"/5	5	3	2		123 x 38.5	0.95	<b>49295</b>
CRL 5"/9	9	9			123 x 38.5	0.95	<b>49294</b>

**Kits ComSeal™**

For rectangular holes, IP55

Kit	# of cables	Diameter range and cable quantity			Dimensions ØxP (mm)	Wgt (kg)	RF COM PN
		3.5 to 16.5 mm	9.5 to 32.5 mm				
ComSeal™ 10/4	4	2	2		173x80.5x33	0.52	<b>49293</b>
ComSeal™ 10/7	7	6	1		173x80.5x33	0.52	<b>49292</b>
ComSeal™ 10/10	10	10			173x80.5x33	0.52	<b>49291</b>
ComSeal™ 16/4	4		4		233x80.5x33	0.67	<b>49283</b>
ComSeal™ 16/7	7	4	3		233x80.5x33	0.67	<b>49290</b>
ComSeal™ 16/10	10	8	2		233x80.5x33	0.67	<b>49284</b>
ComSeal™ 16/16	16	16			233x80.5x33	0.67	<b>49289</b>
ComSeal™ 32/8	8		8		241x135x33	1.26	<b>49285</b>
ComSeal™ 32/14	14	8	6		241x135x33	1.26	<b>49288</b>
ComSeal™ 32/20	20	16	4		241x135x33	1.26	<b>49286</b>
ComSeal™ 32/32	32	32			241x135x33	1.26	<b>49287</b>

**Kits ComShelt**

For rectangular holes, special for shelters, IP 55

Kit	# of cables	Diameter range and cable quantity			Dimensions ØxP (mm)	Wgt (kg)	RF COM PN
		3.5 to 16.5 mm	9.5 to 32.5 mm	24 to 54 mm			
ComShelt S/12	12	6	6		342x305x95	2.8	<b>49302</b>
ComShelt S/30	30	30			342x305x95	2.8	<b>49303</b>
ComShelt L/6	6			6	422x305x95	3.9	<b>49306</b>
ComShelt L/18	18	6	12		422x305x95	3.9	<b>49305</b>

**Kits EzEntry™ mini**

For rectangular holes, shelters and cabinets, IP55

Kit	# of cables	Diameter range and cable quantity		Dimensions ØxP (mm)	Wgt (kg)	RF COM PN
		3.5 to 10.5 mm	3.5 to 16.5 mm			
EzEntry™ 4 mini/4	4		4	76x76x24	0.1	<b>49307</b>
EzEntry™ 4 mini/9	9	9		76x76x24	0.1	<b>49308</b>


**Kits EzEntry™**

For rectangular holes, shelters and cabinets, IP66/67

Kit	# of cables	Diameter range and cable quantity		Dimensions ØxP (mm)	Wgt (kg)	RF COM PN
		3.5 to 16.5 mm	9.5 to 32.5 mm			
EzEntry™ 4/4	4	4		97x70x31	0.13	<b>47712</b>
EzEntry™ 10/4	4	2	2	168x70x31	0.3	<b>49316</b>
EzEntry™ 10/7	7	6	1	168x70x31	0.3	<b>49317</b>
EzEntry™ 10/10	10	10		168x70x31	0.3	<b>49318</b>
EzEntry™ 16/4	4		4	228x90x33	0.39	<b>49309</b>
EzEntry™ 16/10	10	8	2	228x90x33	0.39	<b>47714</b>
EzEntry™ 16/16	16	16		228x90x33	0.39	<b>47713</b>
EzEntry™ 24/6	6		6	325x90x41	0.8	<b>49310</b>
EzEntry™ 24/15	15	12	3	325x90x41	0.8	<b>49311</b>
EzEntry™ 24/24	24	24		325x90x41	0.8	<b>49312</b>
EzEntry™ 32/8	8		8	405x90x41	1.03	<b>49313</b>
EzEntry™ 32/20	20	16	4	405x90x41	1.03	<b>49314</b>
EzEntry™ 32/32	32	32		405x90x41	1.03	<b>49315</b>

Roxtec advantages

- Wide range of cable/pipe lengths: 3 – 640 mm.
- Excellent sealing.
- Quicker installations.
- Easy maintenance: the seal can be opened and closed several times, whenever a cable or pipe has to be added or replaced.
- Possible to mount cables with connectors already assembled.
- Optimizes space used for cable/pipe entry.
- Optimizes stocking of parts.
- High performance against: dust, animals, water, fire, gases, EMI, explosion, ...

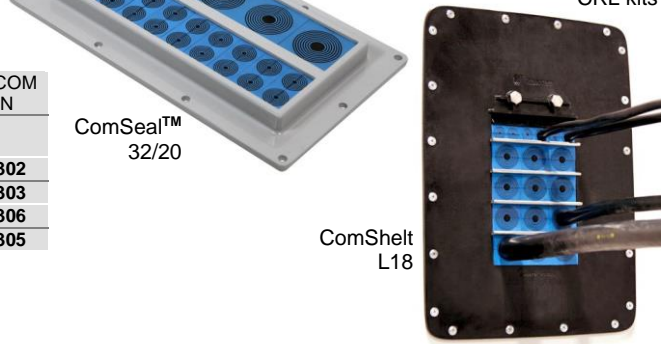

Sealing module layers